

Product Sales Sheet

ECOfit Plus

ECOfit Plus features a 3.2mm composition rubber surface fusion bonded to a 12mm composition rubber backing that results in dynamic energy return that forces the user to stay off their heels and on the balls of their feet. ECOfit Plus is available in both glue down rolls and adhesive-free interlocking tiles.



Markets

- Fitness

Applications

- Group Fitness
- Light Weights
- Cardio

Benefits

- Fade resistant/wears well
- Slip resistant wet or dry
- ECOguard coated



Product Options

Size:

Available as a standard in rolls and interlocking tiles. Custom options available. All custom options should be discussed with your local agent to determine availability, pricing, minimums and lead times.



48" (1.22m) x 25 (7.6m) linear feet
 Thickness: 15.2mm (3.2mm + 12mm) x 48" (1.2m) x 25 linear feet
 3.2mm wear layer, 12mm rubber backing



23" (580mm) x 23" (580mm)
 Thickness: 15.2mm x 23" (58cm) x 23" (58cm)
 3.2mm wear layer, 12mm rubber backing

Color Options:

• See website for colors.



Technical Details

| Performance Criteria | Test Standard | Typical Results |
|--------------------------|---------------|------------------|
| Static Load Limit | ASTM F970 | 0.010" (@125psi) |
| Coefficient of Friction | ASTM D2047 | >0.6 |
| FloorScore | CA 01350 | Certified |
| Pill Test | ASTM D2859 | Pass |
| Impact Insulation Class* | ASTM E492 | 58 |
| Delta IIC* | ASTM E2179 | 27 |

*Tested on a 6" concrete slab with no ceiling.



35.5%


Force Reduction
Absorption of impact energy



51.9%

Energy Restitution
Useful return of impact energy

Values based on Deltec Test

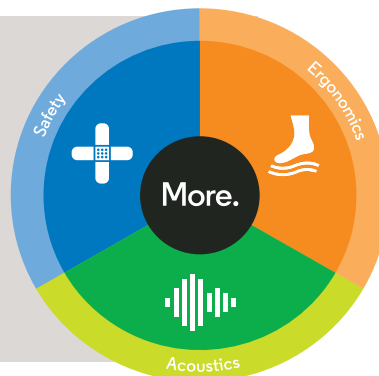

Can a floor
do more?
Yes.