


6015H

Commercial Underlayment

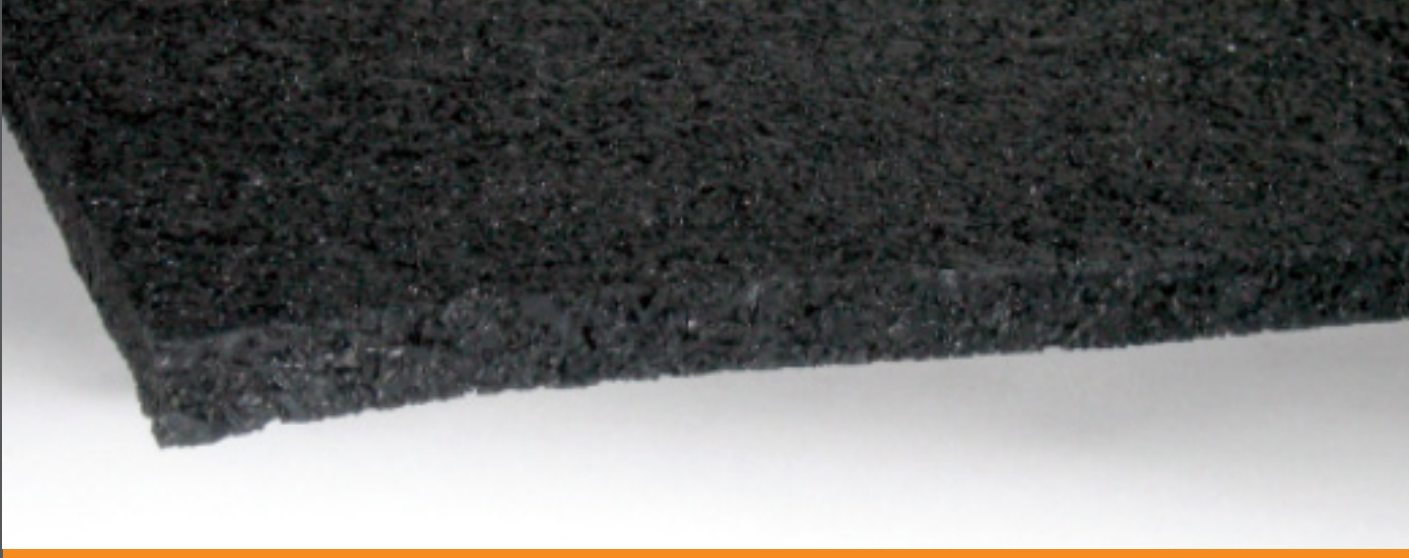

This vulcanized composition underlayment delivers high performance and superior durability for commercial applications.

Available In

Thickness	Width	Roll Length
5mm	59"	82 feet

Physical Data Test

Property	Test Method	Typical Results
Density	ASTM D297	45lbs/ft ² min
Tensile Strength	ASTM D412, Die C	90 psi
Elongation	ASTM D412, Die C	50%
Tear Strength	ASTM D624, Die C	30 ppi
Shore A Hardness	ASTM D2240	45

