

## Product Sales Sheet

# ECOfit

ECOfit offers the most expansive color line in the industry, featuring sophisticated neutrals all the way to the brightest brights. While color is critical, the performance of ECOfit has been enhanced using itstru technology. This technology allows the floor usage to go beyond traditional dumbbells and cardio equipment. With bolstered force reduction, ECOfit balances durability with ergonomics.



## Markets

- Corporate
- Hospitality
- Corporate Extension

## Applications

- Cardio
- Strength & Conditioning
- Therapy/Rehab
- Recreation

## Benefits

- Impact absorption
- Fade resistant/wears well
- Slip-resistant wet or dry
- ECOguard coated



## Product Options

### Size:

Available as a standard in rolls. Custom options available. All custom options should be discussed with your local agent to determine availability, pricing, minimums and lead times.



48" (1.22m) x 25 (7.6m) linear feet  
 Thickness: 8.2mm  
 3.2mm wear layer, 5mm rubber backing\*

### Color Options:

See website for color options.

\* Backing can be sold separately, Minimum order for laminated material required.



## Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.004" (@250psi)
Coefficient of Friction	ASTM D2047	>0.9
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	<1g, 1000 cycles
Pill Test	ASTM D2859	Pass
Impact Insulation Class*	ASTM E492	54
Delta IIC*	ASTM E2179	24

\*Tested on a 6" concrete slab with no ceiling.



**Force Reduction**  
Absorption of impact energy


14.5%



**Energy Restitution**  
Useful return of impact energy

66.7%

Values based on Deltac Test

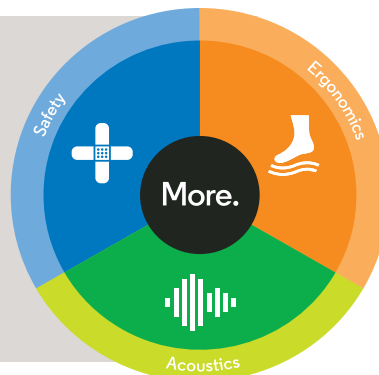

Can a floor  
do more?  
Yes.