

Product Sales Sheet

# FITturf & FITturf Plus

FITturf and FITturf Plus feature a dense, textured 3mm thick nylon wear layer that is fusion bonded to a 5mm or 12mm composition rubber backing, simulating natural turf.



## Markets

- Corporate
- Education
- Hospitality
- Multifamily
- Public Buildings
- Retail

## Applications

- Activity Rooms
- Cardio
- Community Centers
- Group Exercise Centers
- Recreation
- Specialty Retail Floor
- Strength & Conditioning

## Benefits

- Durable & Sustainable
- Affordable
- Ease of Maintenance
- Slip-Resistant
- No Infill
- Portable (Interlocking)
- Indoor Only



## Product Options

### Size:


Available as a standard in rolls and tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.



Rolls:  
Available in 6' rolls.  
FITturf: 8mm (3mm + 5mm)  
FITturf Plus: 15mm (3mm + 12mm)




Tiles:  
FITturf Plus: 15mm (3mm + 12mm)  
Interlocking tiles are available with a coordinating interlocking transition system.

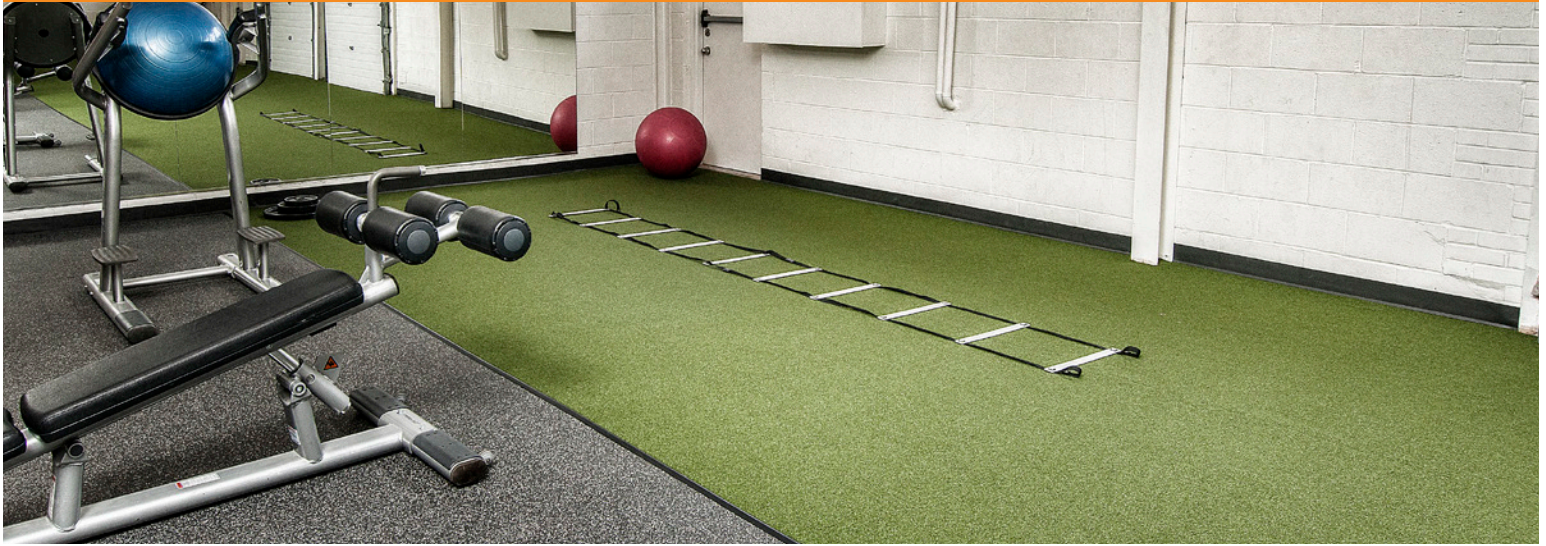


## Technical Details

Performance Criteria	Test Standard	Typical Results
Tuft Bind	ASTM D1335	> 8 lbs
Tear Strength	ASTM D5034	> 200 lbs
Lead Content	ASTM D2765	< 50 ppm
Total Yarn Linear Density	ASTM D1577	4,200 Denier
Yarn Breaking Strength	ASTM D2256	> 19 lbs
Yarn Melting Point	ASTM D7138	428°F
Flammability	ASTM D2859	Pass
Impact Insulation Class*	ASTM E492	74
Delta IIC*	ASTM E2179	36

\*Tested on a 6" concrete slab with no ceiling with 12mm rubber backing.

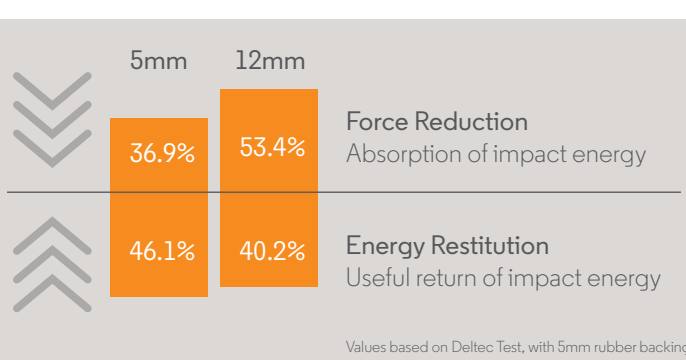

Values based on Deltec Test, with 5mm rubber backing.

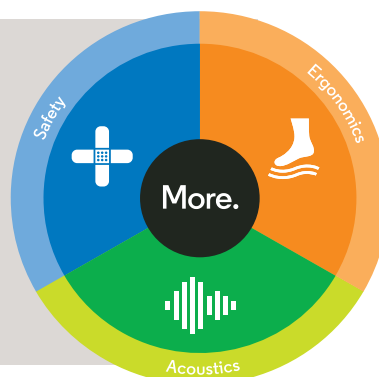

Can a floor  
do more?  
Yes.