

# Forest Rx

## Technical Details

Performance Criteria	Test Standard	Results
Static Load Limit	ASTM F970 modified	0.004" (@ 1,000 psi) after 96 hours
Coefficient of Friction	ASTM D2047	> 0.6
FloorScore	FloorScore	Certified
Reaction to Fire	ASTM E648	Class 1
Abrasion Resistance	ASTM D3389	< 1g, 1000 cycles
Impact Insulation Class *	ASTM E492	52
Delta IIC *	ASTM E2179	23
Floor Impact Sound	ASTM E3133	77 dBA
Force Reduction	Deltec	11.5%
Energy Restitution	Deltec	72.0%



Forest Rx

empowered by  
**ecore**<sup>™</sup>

715 Fountain Ave • Lancaster, PA 17601  
U.S. and Canada: 877-258-0843  
International: 717-295-3400  
[ecorecommercial.com](http://ecorecommercial.com) | [sales@ecorecf.com](mailto:sales@ecorecf.com)

Rx  
Collection

ecore<sup>™</sup>



HONEY LIMED ASH

3388



SUN BLEACHED OAK

9825

ecore



RICH CHERRY

3310



WARM BEECH

3290



ROASTED LIMED ASH

3393



COASTAL OAK

3109



AMERICAN OAK

3380



EUROPEAN OAK

3340



IRONWOOD

3104




SMOKED OAK

9827



TOASTED OAK

9822

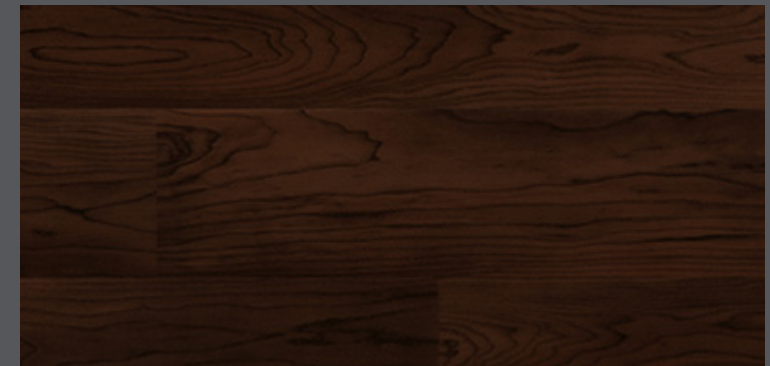

AGED OAK

9824

Forest Rx



WHISPER GREY

3386

### Dimensions


7mm Rolls (2mm + 5mm)

72" (1.83m) x 30LF (9.14m)



Actual samples and final product may vary from color swatches shown. For additional information, please visit [ecorecommercial.com](http://ecorecommercial.com).

BUILT ON  
**itsTRU**  
TECHNOLOGY

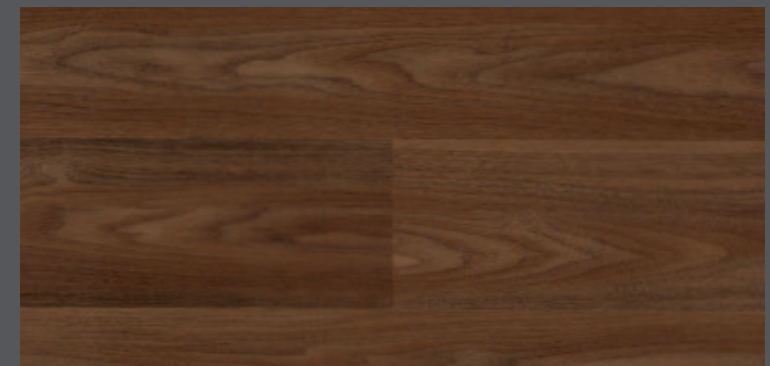

BLACK WALNUT

3381