


# 6015H

## Commercial Underlayment

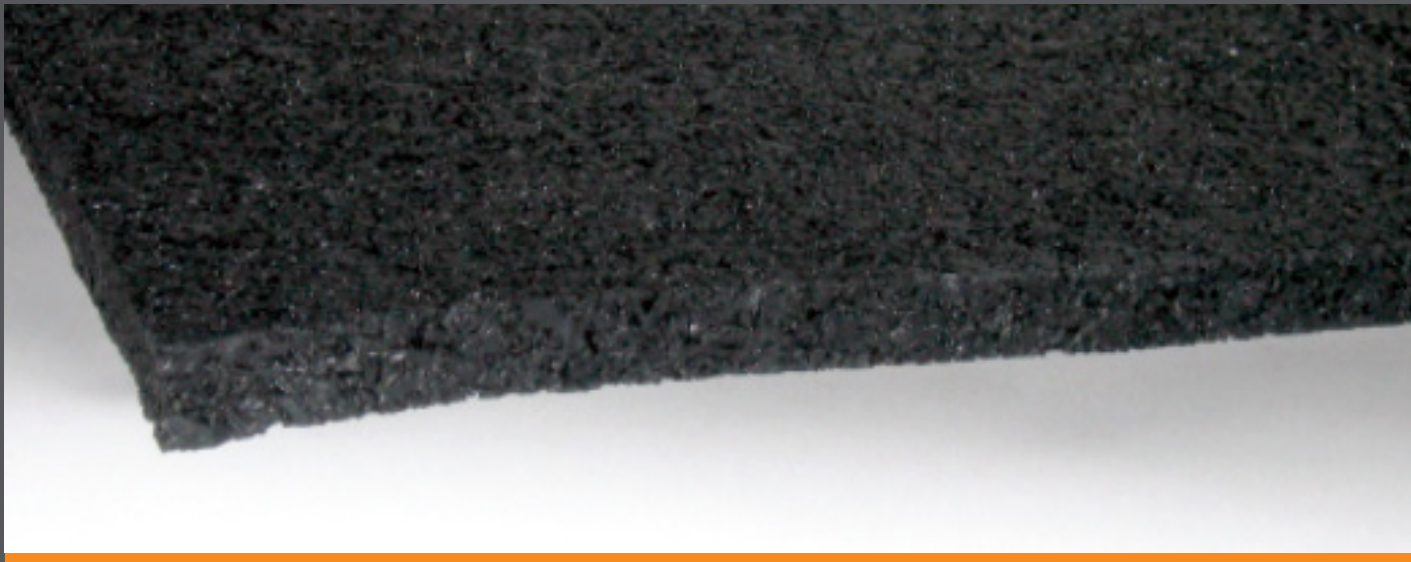

This vulcanized composition underlayment delivers high performance and superior durability for commercial applications.

### Available In

<b>Thickness</b>	<b>Width</b>	<b>Roll Length</b>
5mm	59"	82 feet

### Physical Data Test

<b>Property</b>	<b>Test Method</b>	<b>Typical Results</b>
Density	ASTM D297	45lbs/ft <sup>2</sup> min
Tensile Strength	ASTM D412, Die C	90 psi
Elongation	ASTM D412, Die C	50%
Tear Strength	ASTM D624, Die C	30 ppi
Shore A Hardness	ASTM D2240	45

